




UNBALANCED CROSS




TEE

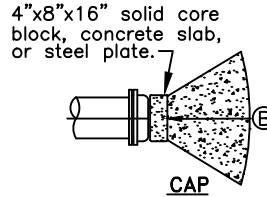


CAP




TAPPED CAP/PLUG




90° BEND



45° BEND



22½° BEND



11¼° BEND

General Notes:

1. Concrete thrust block area based upon a safe soil bearing load of 2000/(3000) Lbs. per Sq. Ft (sand/(sand gravel)).
2. Areas must be adjusted for other size pipe, pressures and soil conditions.
3. Concrete blocking shall be cast-in-place and have minimum of 1/2 square foot contact bearing against the fitting.
4. Block shall bear against fittings only and shall be clear of joints to permit taking up or dismantling joint. Install 8 mil. plastic sheeting between fitting and block.
5. Contractor shall install blocking adequate to withstand test pressure as well as to continuously withstand operating pressure under all conditions of service.
6. Polyethylene wrap not shown for clarity.
7. In muck or peat, pipe and fitting restraint shall be as directed by the District.

THRUST BLOCK SIZING FOR 250 PSI PRESSURE


Min. Bearing Area Against Undisturbed Soil in Square Feet.

PIPE SIZE	(A)	(B)	(C)	(D)	(E)
4"	3/(2)	2/(1)	2/(1)	1/(1)	1/(1)
6"	6/(4)	4/(3)	3/(2)	2/(1)	1/(1)
8"	10/(7)	7/(5)	5/(4)	3/(2)	2/(1)
10"	15/(10)	11/(7)	8/(5)	4/(3)	2/(2)
12"	22/(14)	15/(10)	12/(8)	6/(4)	3/(2)
14"	29/(20)	21/(14)	16/(11)	8/(5)	4/(3)
16"	38/(26)	27/(18)	21/(14)	11/(7)	5/(4)
18"	48/(32)	34/(23)	26/(18)	13/(9)	7/(5)
20"	60/(40)	42/(28)	32/(22)	17/(11)	8/(6)
24"	86/(58)	61/(41)	47/(31)	24/(16)	12/(8)


SAFE BEARING LOADS IN LBS./SQ. FT.

The safe bearing loads given in the following table are for horizontal thrusts when the depth of cover over the pipe exceeds 2 feet.

SOIL	SAFE SOIL BEARING LOAD
*Muck, peat, etc.(See note 7.)	0
Soft clay	1,000
Sand	2,000
Sand and gravel	3,000
Sand and gravel cemented w/clay	4,000
Hard shale	10,000

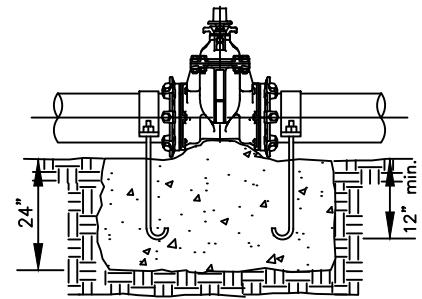

INLINE VALVE - PROFILE

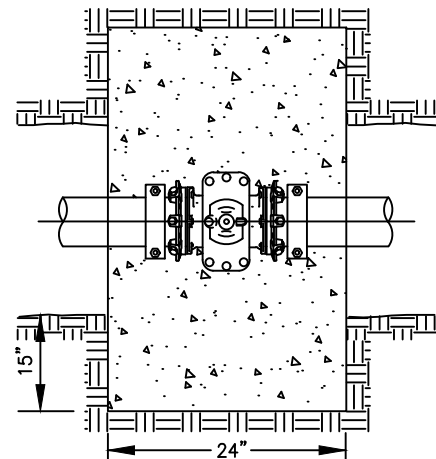

INLINE VALVE - PLAN

Notes:

1. Concrete blocking area is based on 250 psi water pressure and 2500 psi concrete strength.
2. Hardware not embedded in concrete shall be cleaned and coated with coal tar epoxy.
3. In-line valve shall be M.J. x M.J. and be restrained with Mega-Lugs, or equal.
4. Restraining hardware shall be per NUD Standard Water Detail #2 for vertical blocking.

CONCRETE BLOCKING - HORIZONTAL

NOT TO SCALE

Detail Approvals
 Editor TDC
 Manager DPK

**NORTHSHORE UTILITY DISTRICT
 STANDARD WATER DETAILS**

1